







GALİPOĞLU®
HIDROMAS

HIDROMAS GEAR PUMPS 30 SERIES / 55L- 65L - 82L

55 cc BI-ROTATIONAL GEAR PUMP-UNI
DP 30-55 T1 ÇİFT DÖNÜŞLÜ (ARKA G-Ç) DİŞLİ POMPA

Product Code / Ürün Kodu : PDCD3005510013
Ref. No : 0001

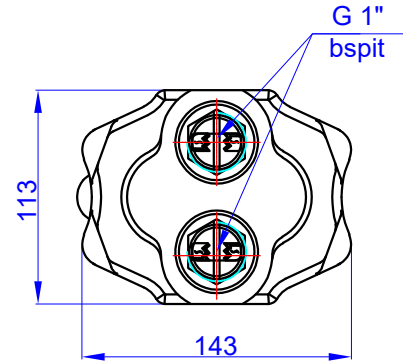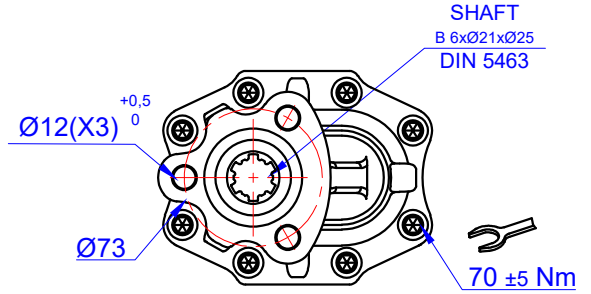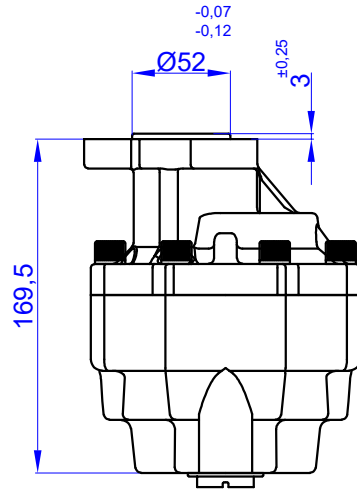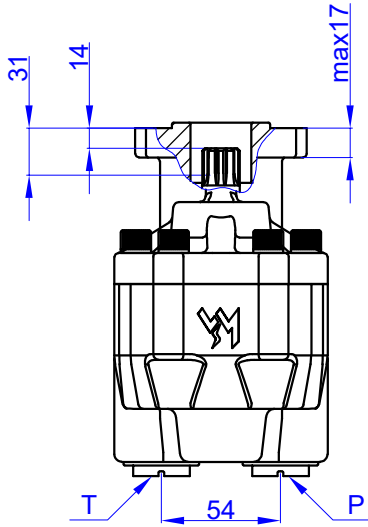

TEKNIK BİLGİLER / TECHNICAL DATA

Specifications

Displacement	55	cm³/rev
Max. Peak Pressure (P3)	250	bar
Max. Intermittent Pressure (P2) (for tipping applications)	240	bar
Max. Continuous Pressure (P1)	220	bar
Max. Speed at Intermittent Press.	2000	min ⁻¹
Min. Speed at Intermittent Press.	300	min ⁻¹
Max. Speed at Continuous Press.	1700	min ⁻¹
Oil Temperature Range	-40 ~ 80	°C
Inlet Pressure Range (suction side)	0,7 ~ 3	bar
Recommended Oil Viscosity Range	12 ~ 100	mm²/s (cSt)
Max. Starting Viscosity	750	mm²/s (cSt)
Filtration :		
-Working Pressure < 200 bar	25	µm
-Working Pressure > 200 bar	10	µm
Connection :		
Min. Suction Hose Bore Diameter	—	inch
Weight	9.3	kg
Rust prevent oil applied shaft area	protect 12 moths	

Power and Torque

Pressure (Bar)	50	100	150	200	250
Torque (Nm)	49	97	146	195	243


Power (kW)

rpm / Bar	50	100	150	200	250
500	3	5	8	10	13
1000	5	10	16	21	26
1500	8	16	23	31	39
1700	9	18	27	35	44
2000	10	21	31	42	52


rpm (n/min)	Flow (L/min)
500	27
1000	54
1500	81
1700	92
2000	108

DİYAGRAMLAR / DIAGRAMS


Power-Pressure Graphic

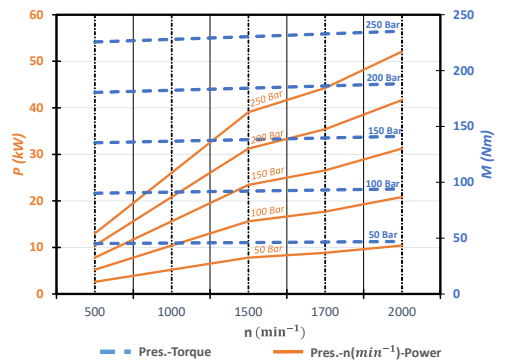


Flow-rpm Graphic

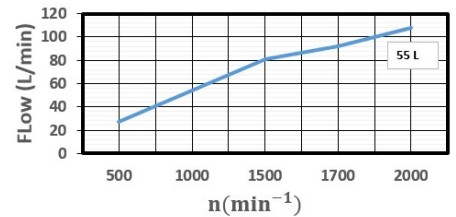


Torque-Pressure Graphic

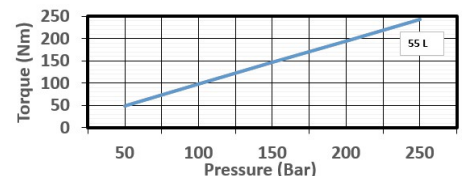

Pressure Definition

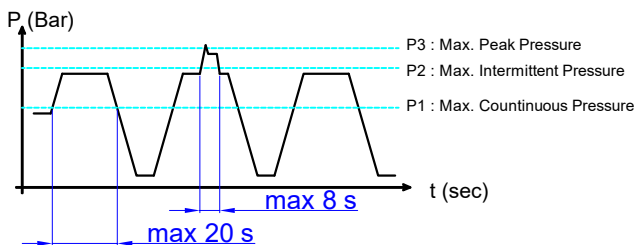

Hydraulic Pump Symbol



Modifications:24.06.2024 / Rev00 /

Phone : 90 332 239 0852 (pbx)

Fax : 90 332 239 0851

• www.hidromas.com

• hidromas@hidromas.com