




GALİPOĞLU  
**HIDROMAS**

Phone : +90 332 239 08 52 (pbx)  
Fax : +90 332 239 08 51  
Mail : hidromas@hidromas.com  
Address : Büyükkayacık Mah. Konya O.S.B. 3 Nolu Sk No:1/A 42250  
SELÇUKLU / KONYA  
TÜRKİYE

GHS 183 x 6 x 3024 K

Drawing No :42183630247

Reference No :01-001

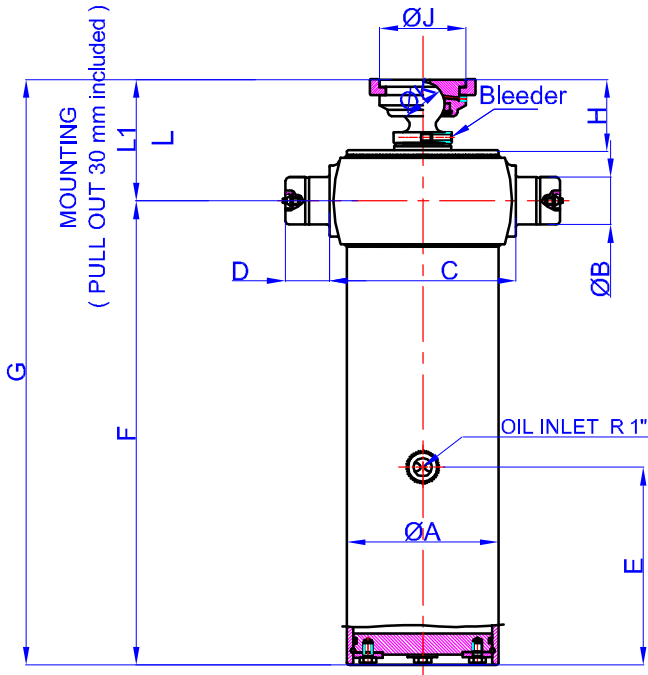

|     |   |     |    |
|-----|---|-----|----|
| A   | : | 207 | mm |
| B   | : | 65  | mm |
| C   | : | 255 | mm |
| D   | : | 60  | mm |
| E   | : | 270 | mm |
| F   | : | 629 | mm |
| G   | : | 799 | mm |
| H   | : | 97  | mm |
| J   | : | 118 | mm |
| K   | : | 60  | mm |
| L   | : | 170 | mm |
| *L1 | : | 200 | mm |

\* Inc 30 mm pull out :  
tolerance +20 -0

Hard Chromed all stages

Working Pressure : 170 Bar 170 Mpa

Max. Working Pressure : 190 Bar 190 Mpa

All Cylinder Materials are St 52 Cold Drawn Tubes

| STAGE                    | 1    | 2    | 3      | 4      | 5     | 6     | 7 | 8 | TOTAL |
|--------------------------|------|------|--------|--------|-------|-------|---|---|-------|
| EFFECTIVE DIAMETER (mm)  | Ø183 | Ø162 | Ø140,5 | Ø119,5 | Ø98,5 | Ø77,5 |   |   |       |
| STROKE                   | 504  | 504  | 504    | 504    | 504   | 504   |   |   | 3024  |
| OIL DISPLACEMENT (L)     | 14,5 | 11,4 | 8,7    | 6,4    | 4,5   | 2,9   |   |   | 50    |
| THRUST AT 170 BAR (TONS) | 47,2 | 37,3 | 28,6   | 21     | 14,3  | 9,3   |   |   |       |